
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

SEDO BENE 40



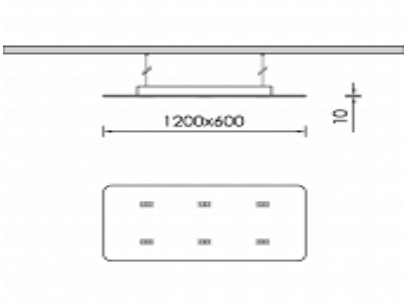

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Acoustic Panel
Product code	PRA0501CL018ON
Product family	BENE
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	600
Length	1200
Height	10


Electrical data

Consumption	13,2
Performance	88.18
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	1164
CRI CCT	927

Light distribution

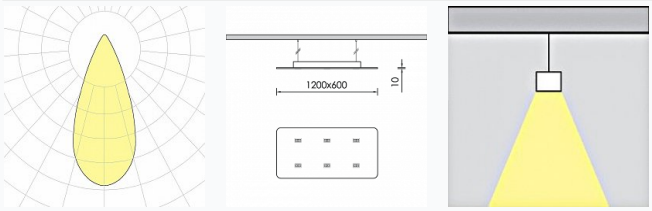

Safety characteristics

IK	04
IP	20

Temperature Operating Conditions

Operating Ambient Temperature	-10…+45°C
Operating Humidity Level	5…95%