
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

SEDO BENE 40



Technical drawings

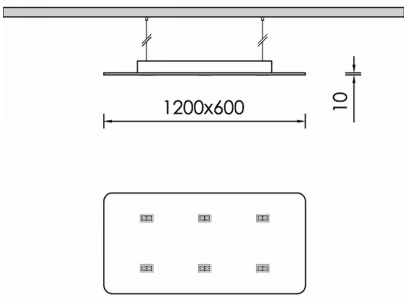

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Acoustic Panel
Product code	PRA0505CL019DAC
Product family	BENE
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Width	600 mm
Length	1200 mm
Height	10 mm


Electrical data

Consumption	19,2 W
Performance	90.63 lm/W
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	N
Beam	15º
Luminous Flux	1740 lm
CRI CCT	930

Light distribution

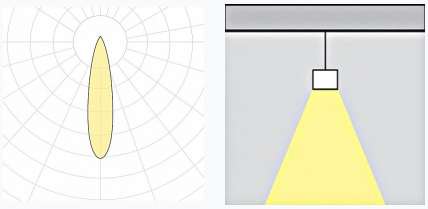

Safety characteristics

IK	04
IP	20

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%