
SEDO FUGA 2 RING UP DOWN



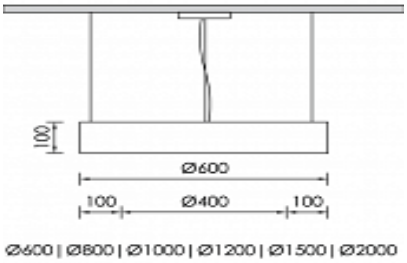

Ø600 | Ø800 | Ø1000 | Ø1200 | Ø1500 | Ø2000

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Acoustic Panel
Product code	PRA0530CL018DA
Product family	FUGA
Diffuser	PMMA
Control Gear	Built-in ECG
Height	100


Electrical data


Consumption	68,8
Performance	63.74
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output


Beam Type	VW
Beam	360º
Luminous Flux	4334
CRI CCT	940
Glare Indicator Ugr Longwise Optics	14
Glare Indicator Ugr Parallel Optics	15

Light distribution





Ø600 | Ø800 | Ø1000 | Ø1200 | Ø1500 | Ø2000



Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>80.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%