

HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

SEDO LATER SQUARE

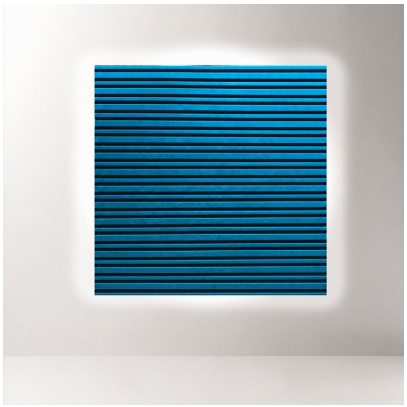

Technical drawings

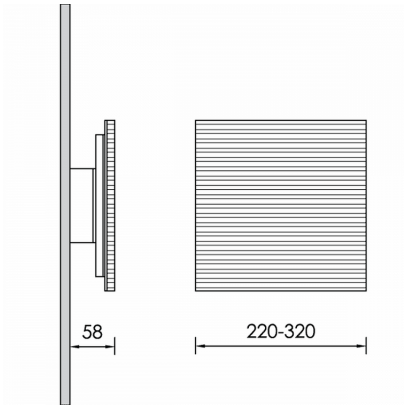

Product Details

CE LM80 LM79 TM21 REACH Source Type LED Strip

General Information

Housing	Acoustic Panel
Product code	PRA0560CL017DA
Product family	LATER
Diffuser	
Control Gear	Built-in ECG
Width	220 mm
Length	220 mm
Height	58 mm


Electrical data


Consumption	6,4 W
Performance	22.33 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	180º
Luminous Flux	134 lm
CRI CCT	940

Light distribution





Safety characteristics

IK	05
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%