

HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

SEDO LATER SQUARE

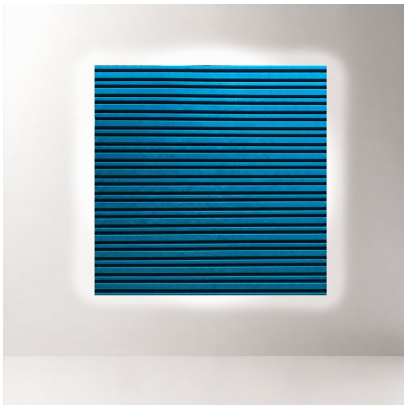

Technical drawings

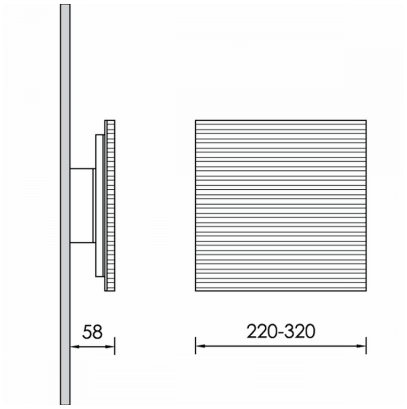

Product Details

CE LM80 LM79 TM21 REACH Source Type LED Strip

General Information

Housing	Acoustic Panel
Product code	PRA0560CL018DAC
Product family	LATER
Control Gear	Built-in ECG
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Width	220 mm
Length	220 mm
Height	58 mm


Electrical data

Consumption	6,4 W
Performance	20.94 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	180º
Luminous Flux	134 lm
CRI CCT	940

Light distribution

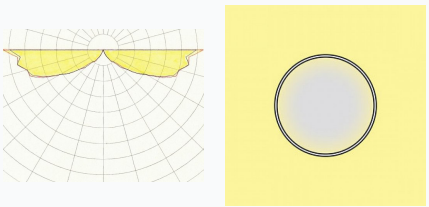

Safety characteristics

IK	05
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%