
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

SEDO FIRMUS SP



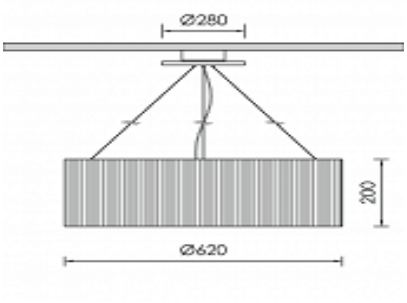

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Acoustic Panel
Product code	PRA0569
Product family	FIRMUS
Diffuser	Opal Polycarbonate
Control Gear	
Height	200


Electrical data

Consumption	49
Performance	110
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	VW
Beam	115º
Luminous Flux	5390
CRI CCT	930
Glare Indicator Ugr Longwise Optics	24
Glare Indicator Ugr Parallel Optics	24

Light distribution

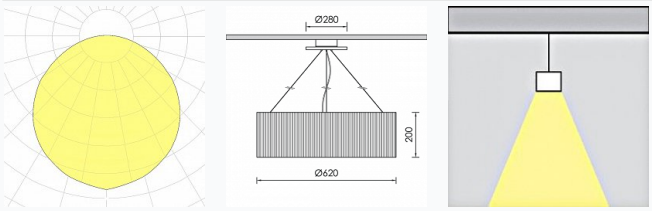

Safety characteristics

IK	03
IP	20

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%