
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

ALBUS 1 LED



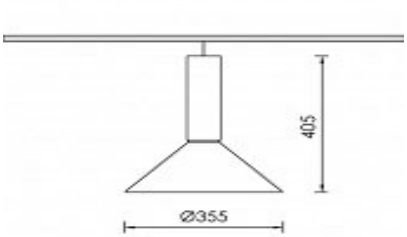

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	HB0027CL002DAC
Product family	ALBUS
Diffuser	
Control Gear	Built-in ECG
Height	405


Electrical data

Consumption	12
Performance	102.67
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	W
Beam	43º
Luminous Flux	1232
CRI CCT	930
Glare Indicator Ugr Longwise Optics	21

Light distribution

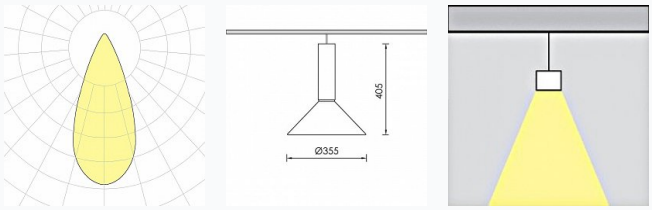

Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%