
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

GIGA 2 LED



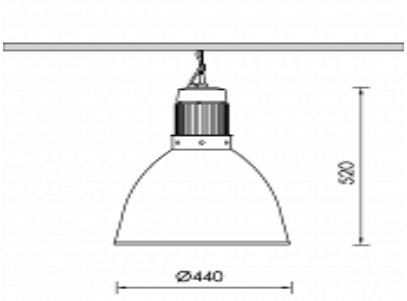

Product Details

CE LM80 LM79 TM21 REACH

Source Type H.P. LED

General Information

Housing	Aluminium
Product code	HB0044CL003DAC
Product family	GIGA
Diffuser	
Control Gear	
Height	520


Electrical data

Consumption	80
Performance	131.88
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	W
Beam	41º
Luminous Flux	10550
CRI CCT	957
Glare Indicator Ugr Longwise Optics	14
Glare Indicator Ugr Parallel Optics	22

Light distribution

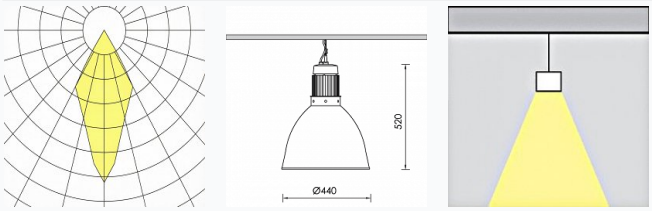

Safety characteristics

IK	04
IP	54
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%