
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

CURA SP



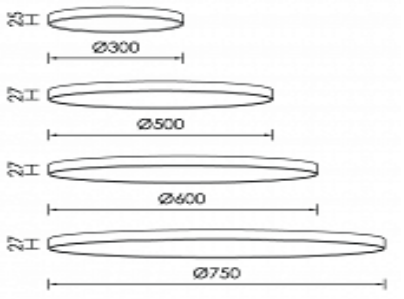

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	ABS
Product code	DES0033CL002DAC
Product family	CURA
Diffuser	PMMA
Control Gear	Built-in ECG
Height	27
Diameter	300


Electrical data

Consumption	24
Performance	117
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	VW
Beam	110º
Luminous Flux	2808
CRI CCT	930

Light distribution

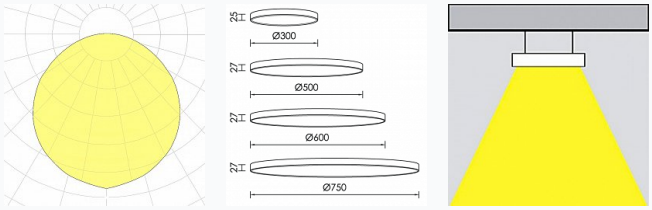

Safety characteristics

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%