
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

FIGO SP UP DOWN



Technical drawings

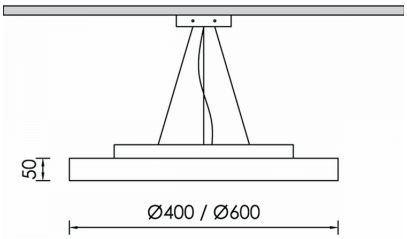

Product Details

CE LM80 LM79 TM21 REACH Source Type COB LED

General Information

Housing	Aluminium
Product code	DES0047CL002DA
Product family	FIGO
Diffuser	Microprismatic
Control Gear	Built-in ECG
Height	50 mm


Electrical data

Consumption	40 W
Performance	78.4 lm/W
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	VW
Beam	93º
Luminous Flux	3136 lm
CRI CCT	940

Light distribution

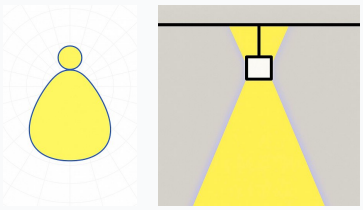

Safety characteristics

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%