
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

FIGO SP UP DOWN



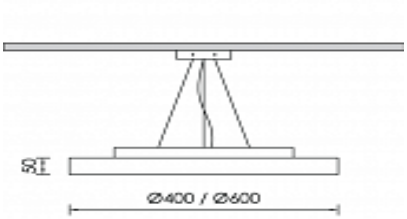

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DES0048CL001DAC
Product family	FIGO
Diffuser	Microprismatic
Control Gear	Built-in ECG
Height	50

Electrical data


Consumption	60
Performance	84.01
Ripple	3
Power Factor	0.96


Luminaire Output

Beam Type	VW
Beam	93º
Luminous Flux	5040
CRI CCT	940

Light distribution







Safety characteristics

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%