
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

COMIS 12 X2LS



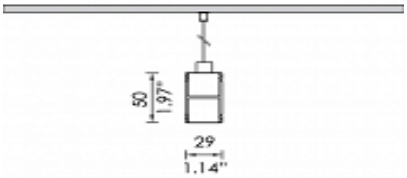

Product Details

CE LM80 LM79 TM21 REACH Source Type LED Strip

General Information

Housing	Aluminium
Product code	DES0245CL001DA
Product family	COMIS
Diffuser	Polycarbonate
Control Gear	Remote Electronic Driver
Width	29
Length	1000
Height	50


Electrical data


Consumption	19.2
Performance	70.05
Ripple	3
Power Factor	0.96
Nominal Voltage	24


Luminaire Output

Beam Type	VW
Beam	360º
Luminous Flux	1345
CRI CCT	940

Light distribution







Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%