
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

AMES 150



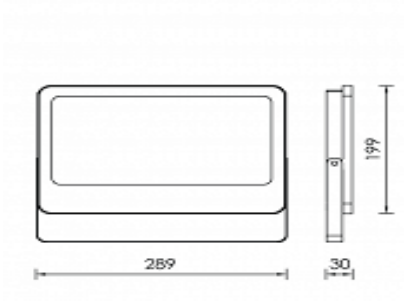

Product Details

CE LM80 LM79 TM21 REACH

Source Type H.P. LED

General Information

Housing	Aluminium
Product code	FL0014CL003DA
Product family	AMES
Diffuser	Opal Glass
Control Gear	Built-in ECG
Width	199
Length	289
Height	30


Electrical data

Consumption	150
Performance	100
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	VW
Beam	110º
Luminous Flux	15000
CRI CCT	940

Light distribution

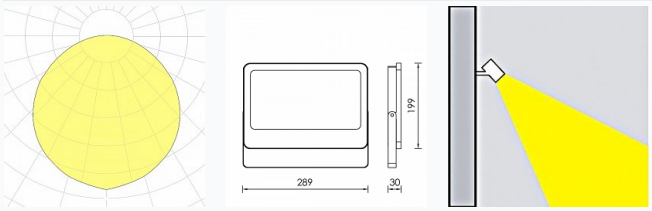

Safety characteristics

IK	06
IP	66

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%