HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# AMES 200






## Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | FL0016CL003DA |
| Product family | AMES |
| Diffuser | Opal Glass |
| Control Gear | Built-in ECG |
| Width | 239 |
| Length | 369 |
| Height | 30 |


### Electrical data

| | |
|---|---|
| Consumption | 200 |
| Performance | 95 |
| Ripple | 3 |
| Power Factor | 0.96 |

### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Beam | 110º |
| Luminous Flux | 19000 |
| CRI CCT | 930 |

### Light distribution

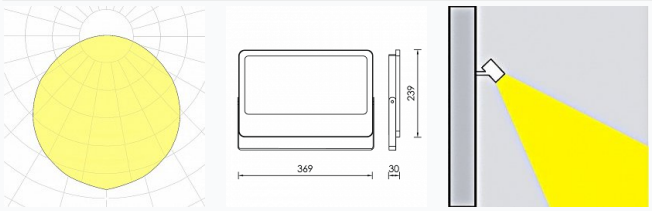


### Safety characteristics

| | |
|---|---|
| IK | 06 |
| IP | 66 |

### Temperature Operating Conditions

| | |
|---|---|
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |