
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

COMIS 14 RING UP DOWN



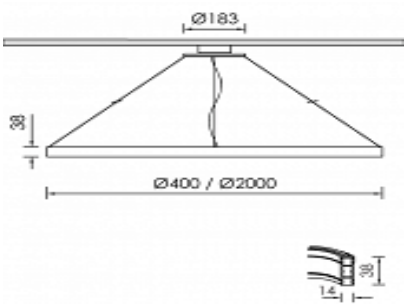

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRS2009CL003DAC
Product family	COMIS
Diffuser	
Control Gear	Remote Electronic Driver
Height	38
Diameter	2000


Electrical data


Consumption	131.95
Performance	45.05
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	VW
Beam	360º
Luminous Flux	5944
CRI CCT	927

Light distribution







Safety characteristics

IK	05
IP	65

Temperature Operating Conditions

Operating Ambient Temperature	-10…+45°C
Operating Humidity Level	5…95%