
# COMIS 14 RING UP DOWN



## Technical drawings

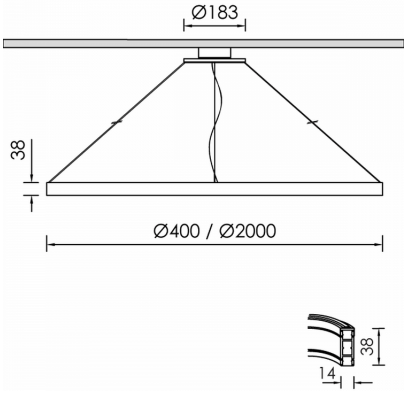


## Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | PRS2012CL001DAC |
| Product family | COMIS |
| Control Gear | Remote Electronic Driver |
| Options for Dimming Control | DALI2 |
| Options for Wireless Dimming | Casambi |
| Height | 38 mm |
| Diameter | 1500 mm |


### Electrical data


| | |
|---|---|
| Consumption | 98.96 W |
| Performance | 51.62 lm/W |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 V |

### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Beam | 360º |
| Luminous Flux | 5108 lm |
| CRI CCT | 940 |

### Light distribution



### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 65 |

### Temperature Operating Conditions

| | |
|---|---|
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |