
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

DEUS 600



Technical drawings

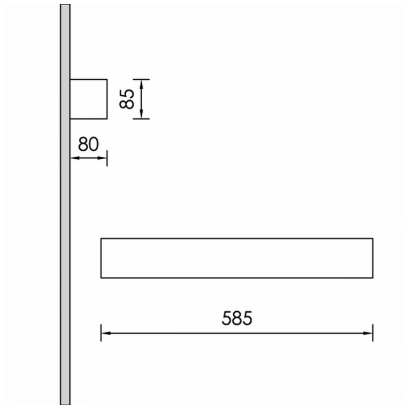

Product Details

CE LM80 LM79 TM21 REACH Source Type LED Strip

General Information

Housing	Ceramic
Product code	DEK0057CL124ON
Product family	DEUS
Diffuser	
Control Gear	Built-in ECG
Width	85 mm
Length	585 mm
Height	80 mm


Electrical data

Consumption	12,6 W
Performance	110.17 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	360º
Luminous Flux	1322 lm
CRI CCT	930

Light distribution

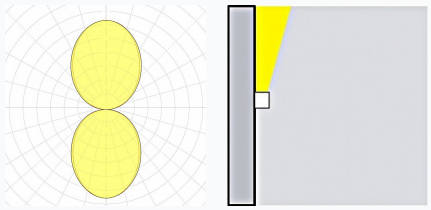

Safety characteristics

IK	02
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L70B10@35°C
Operating Ambient Temperature	-10...+45ºC
Operating Humidity Level	5...95%