
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

RENONO



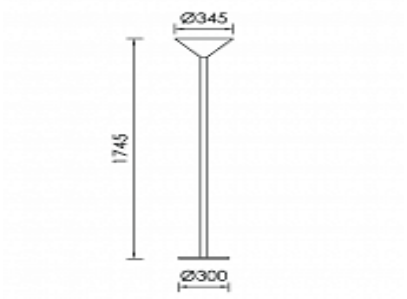

Product Details

CE LM80 LM79 TM21 REACH

Source Type SMD LED

General Information

Housing	Metal
Product code	DEF0008CL002
Product family	RENONO
Diffuser	
Control Gear	
Height	1745
Diameter	345


Electrical data

Consumption	21
Performance	89.76
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	VW
Beam	118º
Luminous Flux	1885
CRI CCT	940

Light distribution

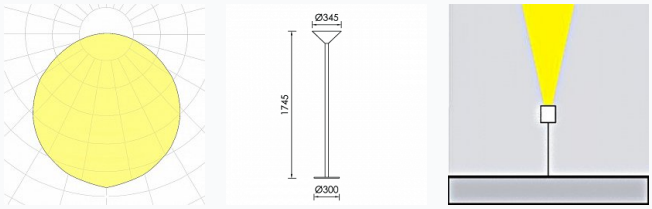

Safety characteristics

IK	04
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-10...+45ºC
Operating Humidity Level	5...95%