
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# RENONO



## Technical drawings

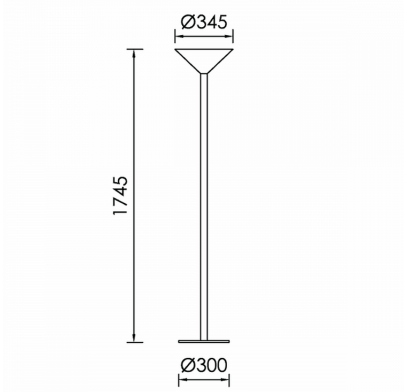


## Product Details

CE LM80 LM79 TM21 REACH Source Type SMD LED

### General Information

| | |
|---|---|
| Housing | Metal |
| Product code | DEF0008CL100 |
| Product family | RENONO |
| Diffuser | |
| Control Gear | |
| Height | 1745 mm |
| Diameter | 345 mm |


### Electrical data

| | |
|---|---|
| Consumption | 21 W |
| Performance | 89.76 lm/W |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 V |

### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Beam | 118º |
| Luminous Flux | 1885 lm |
| CRI CCT | 940 |

### Light distribution

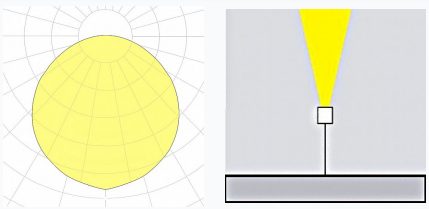

### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 20 |
| Protection Class | Class II |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45ºC |
| Operating Humidity Level | 5...95% |