
LATER



Technical drawings

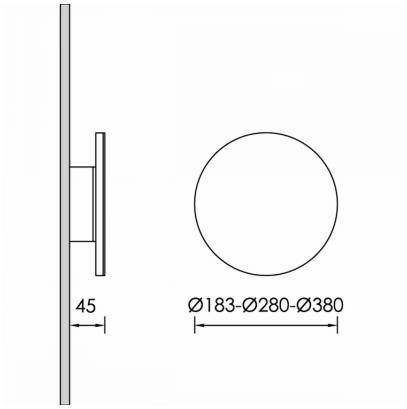

Product Details

CE LM80 LM79 TM21 REACH Source Type LED Strip

General Information

Housing	Metal
Product code	DEW0006CL004DAC
Product family	LATER
Diffuser	
Control Gear	Built-in ECG
Height	45 mm


Electrical data

Consumption	12,8 W
Performance	21.83 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	180º
Luminous Flux	262 lm
CRI CCT	940

Light distribution

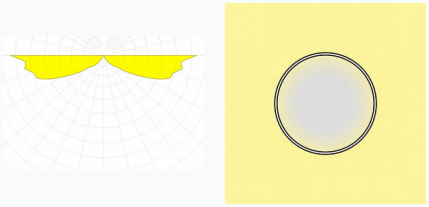

Safety characteristics

IK	05
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45ºC
Operating Humidity Level	5...95%