
LATER STONE CIRCLE



Technical drawings

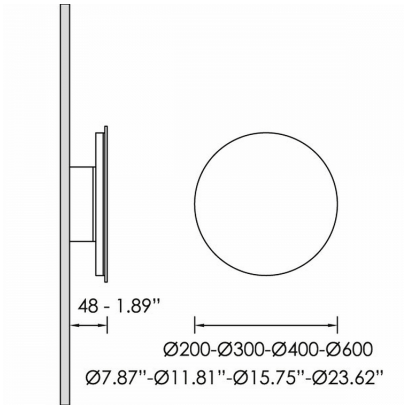

Product Details

CE LM80 LM79 TM21 REACH Source Type LED Strip

General Information

Housing	Metal
Product code	DEW0012CL130DAC
Product family	LATER
Control Gear	Built-in ECG
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Height	48 mm


Electrical data


Consumption	6,4 W
Performance	20.94 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	180º
Luminous Flux	134 lm
CRI CCT	940

Light distribution





Safety characteristics

IK	05
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45ºC
Operating Humidity Level	5...95%