
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

LATER STONE SQUARE



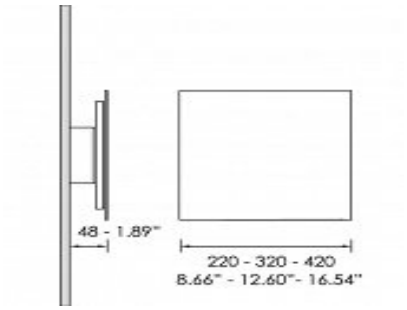

Product Details

CE LM80 LM79 TM21 REACH Source Type LED Strip

General Information

Housing	Metal
Product code	DEW0023CL129DAC
Product family	LATER
Diffuser	
Control Gear	Built-in ECG
Width	420
Length	420
Height	48


Electrical data

Consumption	12,8
Performance	16.25
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	VW
Beam	180º
Luminous Flux	195
CRI CCT	930

Light distribution

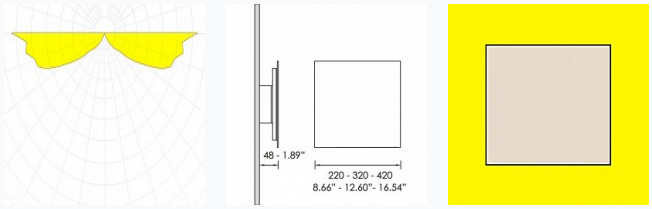

Safety characteristics

IK	05
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45ºC
Operating Humidity Level	5...95%