
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

CURA WALL



Technical drawings

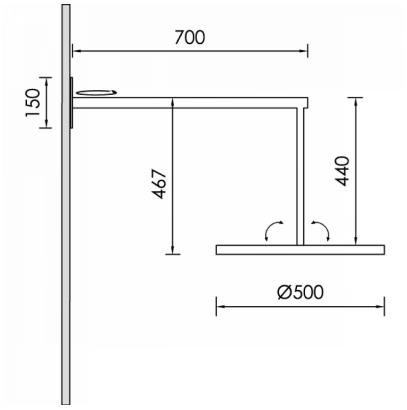

Product Details

CE LM80 LM79 TM21 REACH Source Type COB LED

General Information

Housing	ABS
Product code	DEW0052CL002DAC
Product family	CURA
Diffuser	PMMA
Control Gear	Built-in ECG
Height	950 mm
Diameter	500 mm


Electrical data

Consumption	40 W
Performance	127 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	110º
Luminous Flux	5080 lm
CRI CCT	940

Light distribution

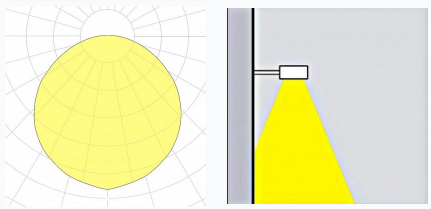

Safety characteristics

IP	20
Protection Class	Class I

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45ºC
Operating Humidity Level	5...95%