
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STIPO 3 H.P.LED



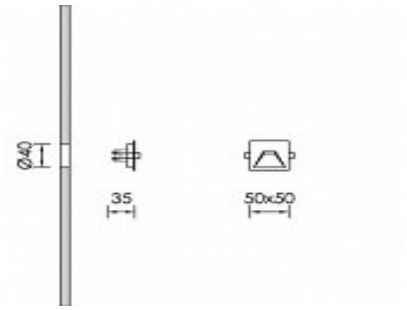

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DEW0127CL001ON
Product family	STIPO
Diffuser	
Control Gear	Remote Electronic Driver
Width	50
Length	50
Height	35


Electrical data

Consumption	1,1
Performance	76.82
Ripple	3
Power Factor	0.96
Nominal Voltage	3

Luminaire Output

Beam Type	W
Beam	50º
Luminous Flux	84.5
CRI CCT	927

Light distribution

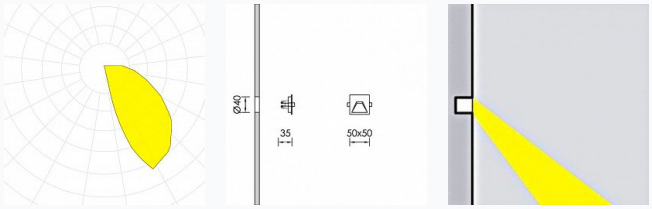

Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-10...+45ºC
Operating Humidity Level	5...95%