
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# FERUS 20 SQ PA H.P.LED



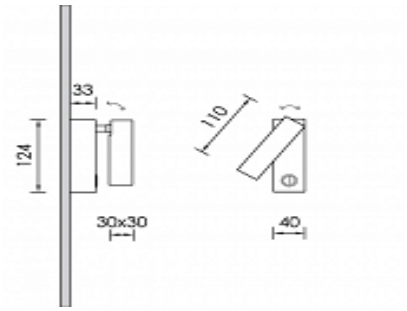


## Product Details

CE LM80 LM79 TM21 REACH

Source Type H.P. LED

### General Information

| | |
|---|---|
| Housing | Metal |
| Product code | DER0195CL006ON |
| Product family | FERUS |
| Diffuser | |
| Control Gear | Built-in ECG |
| Width | 30 |
| Length | 110 |
| Height | 30 |


### Electrical data

| | |
|---|---|
| Consumption | 1,1 |
| Performance | 118.64 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 |

### Luminaire Output

| | |
|---|---|
| Beam Type | W |
| Beam | 45º |
| Luminous Flux | 130.5 |
| CRI CCT | 940 |

### Light distribution

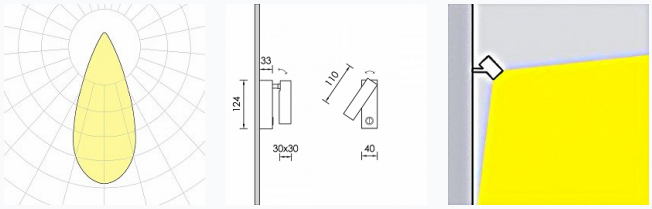


### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 40 |
| Protection Class | Class I |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45ºC |
| Operating Humidity Level | 5...95% |