
PONOS SQ 43 H.P.LED



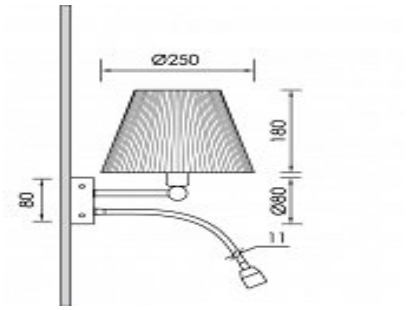

Product Details

CE LM80 LM79 TM21 REACH

Source Type H.P. LED

General Information

Housing	Metal
Product code	DER0319CL002DAC
Product family	PONOS
Diffuser	
Control Gear	
Height	180


Electrical data


Consumption	1,7
Performance	93.82
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	159.5
CRI CCT	927

Light distribution







Safety characteristics

IK	01
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-10...+45ºC
Operating Humidity Level	5...95%