

HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# NUDO OUTDOOR BRASS H.P.LED

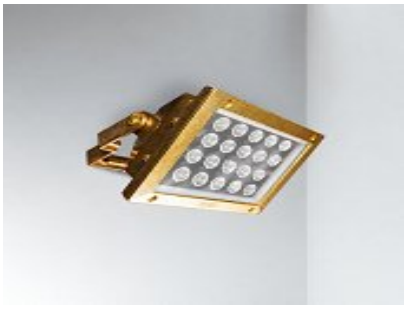

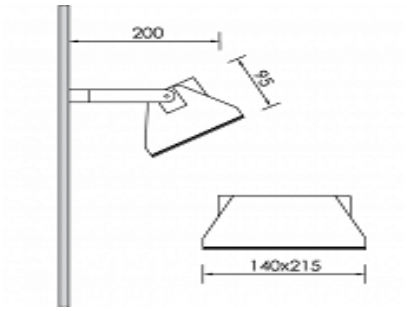


## Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

### General Information

| | |
|---|---|
| Housing | Brass |
| Product code | PJ0097CL002DAC |
| Product family | NUDO |
| Diffuser | Safety Glass Clear |
| Control Gear | Built-in ECG |
| Width | 140 |
| Length | 215 |
| Height | 95 |


### Electrical data


| | |
|---|---|
| Consumption | 26,6 |
| Performance | 148.73 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 |


### Luminaire Output

| | |
|---|---|
| Beam Type | UN |
| Beam | 8º |
| Luminous Flux | 3867 |
| CRI CCT | 930 |

### Light distribution





### Safety characteristics

| | |
|---|---|
| IK | 07 |
| IP | 65 |
| Protection Class | Class I |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L80B10@35°C |
| Operating Ambient Temperature | -20...+45ºC |
| Operating Humidity Level | 5...95% |