

HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NUDO OUTDOOR BRASS H.P.LED

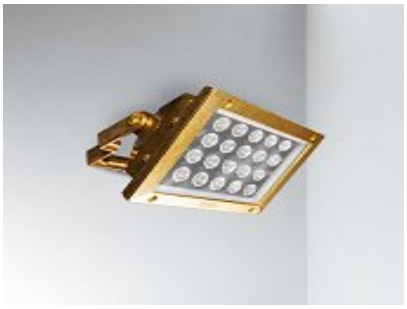

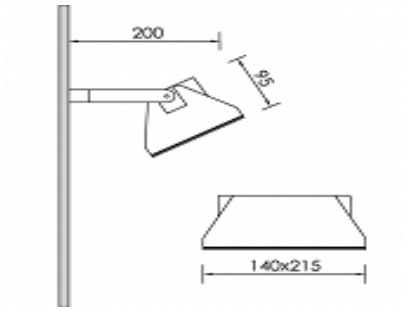

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Brass
Product code	PJ0097CL003DAC
Product family	NUDO
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Width	140
Length	215
Height	95


Electrical data


Consumption	26,6
Performance	148.73
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	3867
CRI CCT	930

Light distribution







Safety characteristics

IK	07
IP	65
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-20...+45ºC
Operating Humidity Level	5...95%