
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NUDO WALL Q H.P.LED



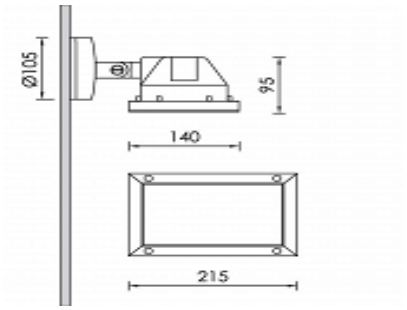

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Brass
Product code	PJ0133CL003DAC
Product family	NUDO
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Width	140
Length	215
Height	95


Electrical data


Consumption	26,6
Performance	97.46
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	ASY
Beam	22º
Luminous Flux	2534
CRI CCT	930

Light distribution







Safety characteristics

IK	07
IP	65
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-20...+45ºC
Operating Humidity Level	5...95%