
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NEPA MAX OUTDOOR



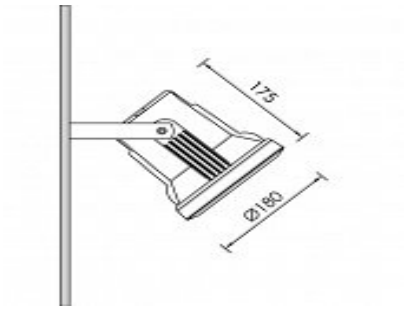

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	PJ0145CL001DAC
Product family	NEPA
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Height	175
Diameter	180


Electrical data

Consumption	13,3
Performance	122.96
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	1598.5
CRI CCT	930

Light distribution

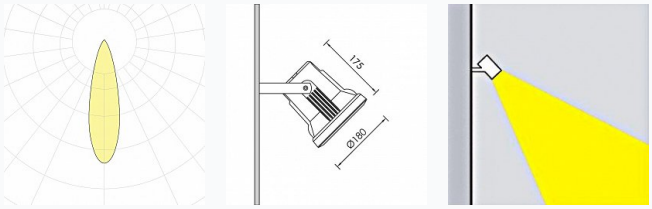

Safety characteristics

IK	07
IP	65
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-20...+45ºC
Operating Humidity Level	5...95%