
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

SATIS OUTDOOR H.P.LED



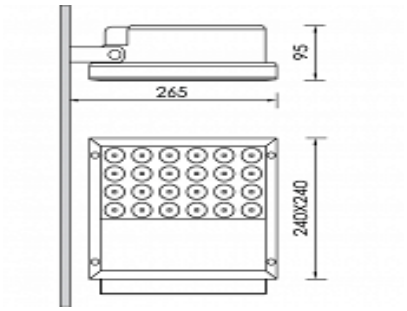

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	PJ0175CL002DAC
Product family	SATIS
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Width	240
Length	240
Height	95


Electrical data

Consumption	26,6
Performance	120.86
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	ASY
Beam	22º
Luminous Flux	3215
CRI CCT	930

Light distribution

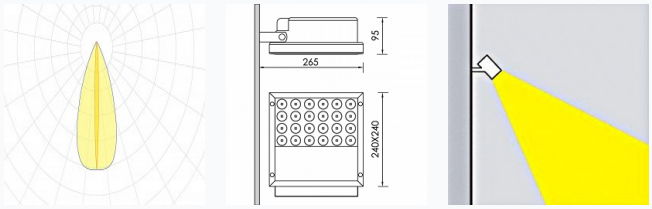

Safety characteristics

IK	05
IP	65
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-20...+45ºC
Operating Humidity Level	5...95%