
DECUS



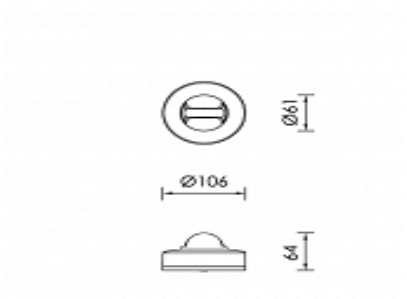

Product Details

CE LM80 LM79 TM21 REACH

Source Type H.P. LED

General Information

Housing	Aluminium
Product code	FA0033CL003DAC
Product family	DECUS
Diffuser	
Control Gear	Built-in ECG
Height	64
Diameter	106


Electrical data

Consumption	1.8
Performance	49.44
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	ASY
Luminous Flux	89
CRI CCT	927

Light distribution

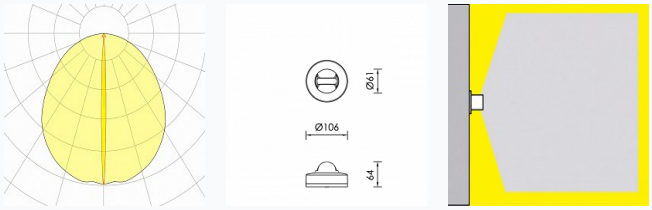

Safety characteristics

IK	06
IP	68
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-20...+45ºC
Operating Humidity Level	5...95%