
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# REGIO OUTDOOR H.P.LED



## Technical drawings

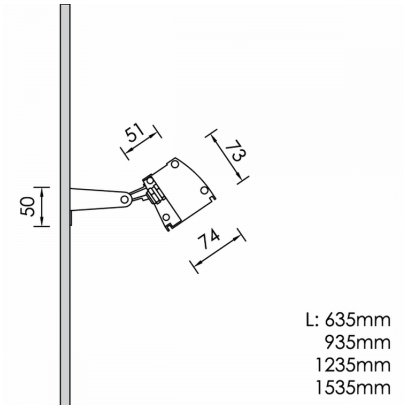


## Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | FA0109CL009DAC |
| Product family | REGIO |
| Diffuser | Safety Glass Clear |
| Control Gear | Built-in ECG |
| Width | 74 mm |
| Length | 635 mm |
| Height | 73 mm |


### Electrical data

| | |
|---|---|
| Consumption | 11.1 W |
| Performance | 103.15 lm/W |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 V |

### Luminaire Output

| | |
|---|---|
| Beam Type | W |
| Beam | 45º |
| Luminous Flux | 1145 lm |
| CRI CCT | 927 |

### Light distribution

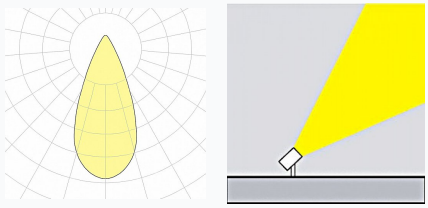

### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 65 |
| Protection Class | Class I |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L80B10@35°C |
| Operating Ambient Temperature | -20...+45ºC |
| Operating Humidity Level | 5...95% |