
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NOTUS 25

CE LM80 LM79 TM21 REACH CE LM8



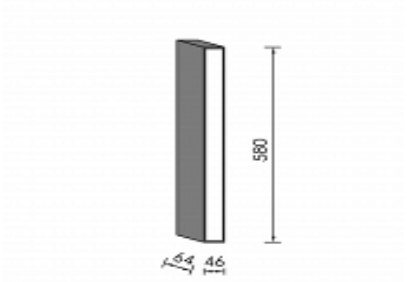

Product Details

TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRC1712CL001DAC
Product family	NOTUS
Diffuser	
Control Gear	Built-in ECG
Width	46
Length	2841
Height	71


Electrical data

Consumption	56.7
Performance	80.05
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	VW
Beam	105º
Luminous Flux	4539
CRI CCT	940
Glare Indicator Ugr Longwise Optics	24
Glare Indicator Ugr Parallel Optics	25

Light distribution

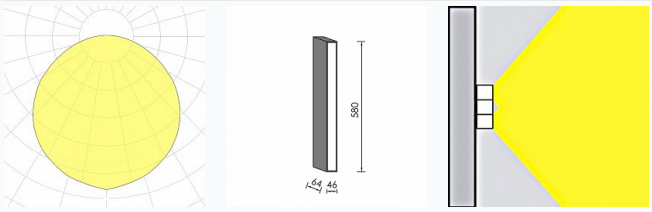

Safety characteristics

IK	04
IP	54
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>80.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%