
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# REGIO GROUND H.P.LED



## Technical drawings

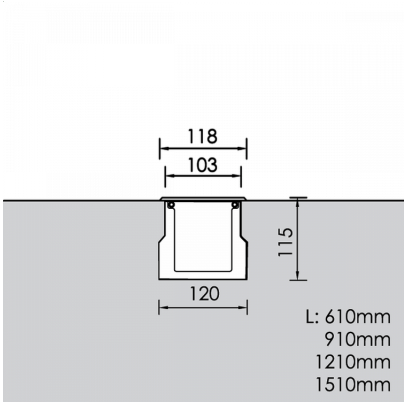


## Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

### General Information

| | |
|---|---|
| Housing | Inox |
| Product code | GR0045CL007ON |
| Product family | REGIO |
| Diffuser | Safety Glass Clear |
| Control Gear | Built-in ECG |
| Width | 120 mm |
| Length | 1235 mm |
| Height | 115 mm |


### Electrical data

| | |
|---|---|
| Consumption | 21.1 W |
| Performance | 103.08 lm/W |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 V |

### Luminaire Output

| | |
|---|---|
| Beam Type | UN |
| Beam | 8º |
| Luminous Flux | 2175 lm |
| CRI CCT | 927 |

### Light distribution

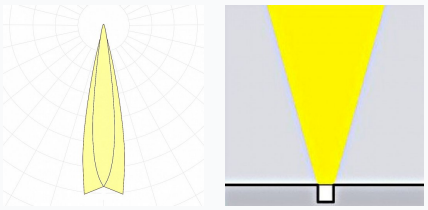

### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 67 |
| Protection Class | Class I |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L80B10@35°C |
| Operating Ambient Temperature | -20...+45°C |
| Operating Humidity Level | 5...95% |