
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NOXA 3 OUT BRASS



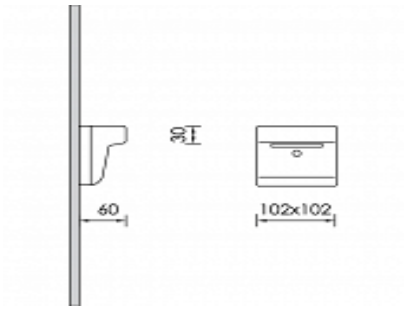

Product Details

CE LM80 LM79 TM21 REACH

Source Type H.P. LED

General Information

Housing	Brass
Product code	WF0028CL001DAC
Product family	NOXA
Diffuser	Opal Polycarbonate
Control Gear	
Width	102
Length	102
Height	55


Electrical data

Consumption	3.2
Performance	73.75
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	ASY
Luminous Flux	236
CRI CCT	927

Light distribution

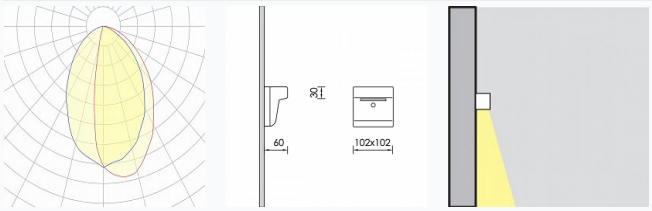

Safety characteristics

IK	08
IP	54
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-20...+45°C
Operating Humidity Level	5...95%