HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

AVUS 40 DOWN



Product Details

CE LM80 LM79 TM21 REACH Source Type SMD LED

General Information

Housing	Aluminium
Product code	WF0202CL010DAC
Product family	AVUS
Diffuser	Safety Glass Sandblast
Control Gear	Built-in ECG
Width	60 mm
Length	380 mm
Height	65 mm


Electrical data

Consumption	12 W
Performance	110.25 lm/W
Ripple	3
Power Factor	0.96

Luminaire Output

Luminous Flux	1323 lm
CRI CCT	940

Light distribution

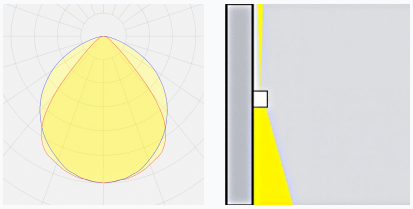

Safety characteristics

IP	65

Temperature Operating Conditions