HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

AVUS 40 UP DOWN



Product Details

CE LM80 LM79 TM21 REACH Source Type SMD LED

General Information

Housing	Aluminium
Product code	WF0203CL010DAC
Product family	AVUS
Diffuser	Safety Glass Sandblast
Control Gear	Built-in ECG
Width	60
Length	380
Height	65


Electrical data

Consumption	24
Performance	106.75
Ripple	3
Power Factor	0.96

Luminaire Output

Luminous Flux	2562
CRI CCT	930

Light distribution

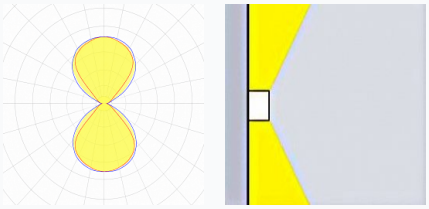

Safety characteristics

IP	65

Temperature Operating Conditions