
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MACTO NOXA



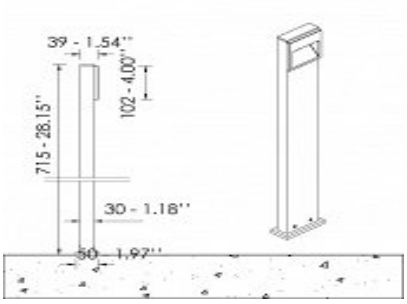

Product Details

CE LM80 LM79 TM21 REACH

Source Type H.P. LED

General Information

Housing	Aluminium
Product code	BO0017CL003DA
Product family	MACTO
Diffuser	Opal Polycarbonate
Control Gear	Built-in ECG
Width	39
Length	715
Height	100


Electrical data

Consumption	1.1
Performance	98.18
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	ASY
Luminous Flux	108
CRI CCT	927

Light distribution

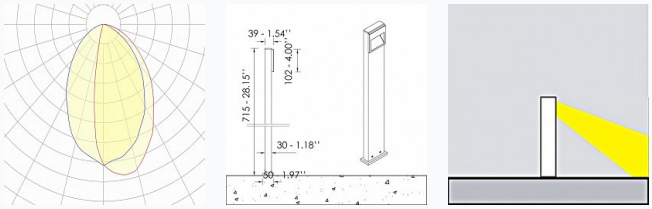

Safety characteristics

IK	04
IP	54
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-20...+45°C
Operating Humidity Level	5...95%