
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

TALIS M



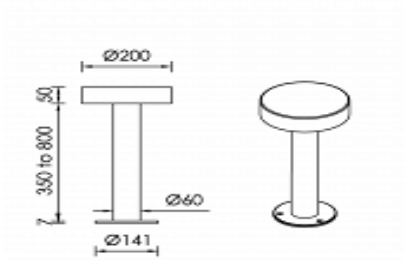

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Brass
Product code	BO0042CL001DAC
Product family	TALIS
Diffuser	PMMA
Control Gear	Built-in ECG
Height	850
Diameter	200


Electrical data

Consumption	8.8
Performance	48.75
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	ASY
Beam	132º
Luminous Flux	429
CRI CCT	930

Light distribution

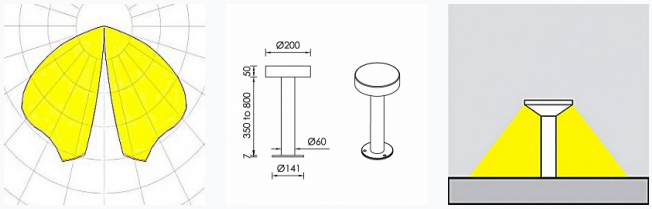

Safety characteristics

IK	07
IP	65
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-20...+45°C
Operating Humidity Level	5...95%