
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VISO TALIS CURVE



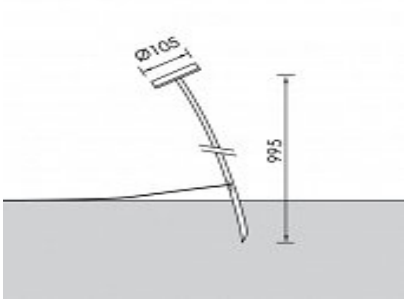

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Brass
Product code	BO0066CL109DA
Product family	VISO
Diffuser	Plastic
Control Gear	Remote Electronic Driver
Height	1012
Diameter	105


Electrical data

Consumption	8.2
Performance	52.68
Ripple	3
Power Factor	0.96
Nominal Voltage	3

Luminaire Output

Beam Type	VW
Beam	117º
Luminous Flux	432
CRI CCT	927

Light distribution

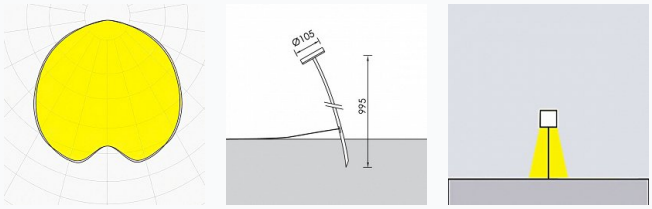

Safety characteristics

IK	05
IP	65
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-20...+45°C
Operating Humidity Level	5...95%