
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VILLA



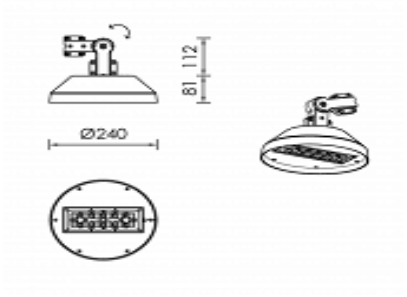

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	AM0321CL140DAC
Product family	VILLA
Diffuser	PMMA
Control Gear	Built-in ECG
Height	81
Diameter	240


Electrical data

Consumption	7.5
Performance	150.67
Ripple	3
Power Factor	0.96
Nominal Voltage	3

Luminaire Output

Beam Type	II
Luminous Flux	1130
CRI CCT	740

Light distribution

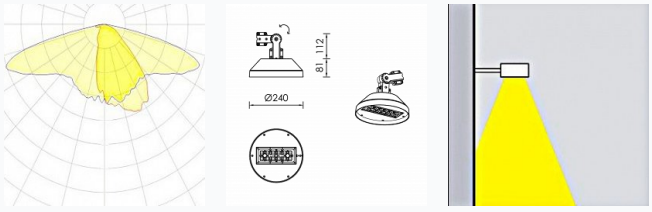

Safety characteristics

IK	05
IP	66
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>100.000h L70B10@25°C
Operating Ambient Temperature	-30...+45°C
Operating Humidity Level	5...95%