
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VILLA FAROS



Technical drawings

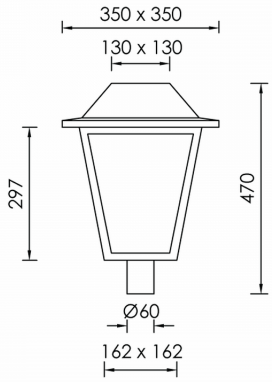

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	AM0353CL009DAC
Product family	VILLA
Diffuser	Lens
Control Gear	Built-in ECG
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Width	350 mm
Length	350 mm
Height	470 mm


Electrical data

Consumption	18 W
Performance	95 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	3 V

Luminaire Output

Beam Type	VW
Beam	104º
Luminous Flux	1710 lm
CRI CCT	930

Light distribution

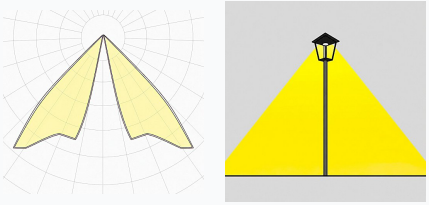

Safety characteristics

IK	02
IP	40

Temperature Operating Conditions

Operating Humidity Level	5...95%