
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

SYSTAR ASYMMETRIC 50



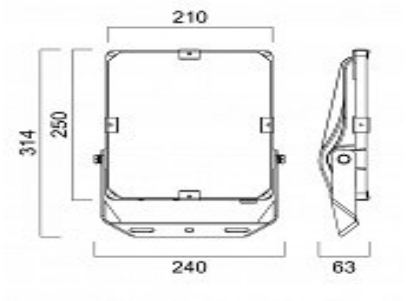

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	FL0019CL002DAC
Product family	SYSTAR
Diffuser	Clear Glass
Control Gear	Built-in ECG
Width	210
Length	250
Height	63


Electrical data


Consumption	50
Performance	135
Ripple	3
Power Factor	0.96
Nominal Voltage	3


Luminaire Output

Beam Type	VW
Beam	90º
Luminous Flux	6750
CRI CCT	940

Light distribution







Safety characteristics

IK	08
IP	66
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B50
Operating Ambient Temperature	-30...+50°C
Operating Humidity Level	5...95%