
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

SYSTAR ASYMMETRIC 150



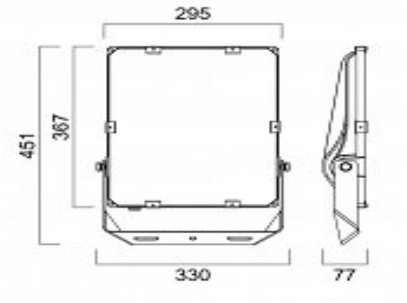

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	FL0020CL002DAC
Product family	SYSTAR
Diffuser	Clear Glass
Control Gear	Built-in ECG
Width	295
Length	367
Height	77


Electrical data

Consumption	150
Performance	132.33
Ripple	3
Power Factor	0.96
Nominal Voltage	3

Luminaire Output

Beam Type	VW
Beam	90º
Luminous Flux	19850
CRI CCT	940

Light distribution

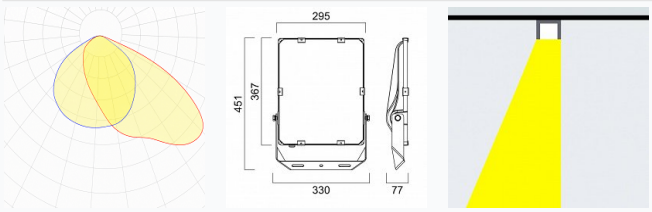

Safety characteristics

IK	08
IP	66
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B50
Operating Ambient Temperature	-30...+50°C
Operating Humidity Level	5...95%