
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

CERAM 3S 2F LED



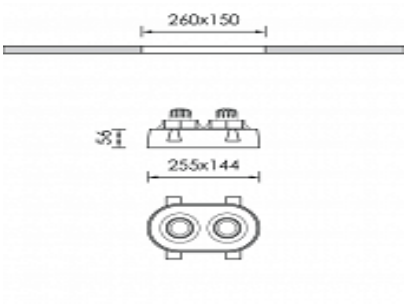

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Γύψος, Αλουμίνιο
Product code	DL5337CL001
Product family	CERAM
Diffuser	
Control Gear	
Width	144
Length	255
Height	56


Electrical data


Consumption	9.8
Performance	97.65
Ripple	3
Power Factor	0.96


Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	957
CRI CCT	940

Light distribution







Safety characteristics

IK	02
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h Module 3x H.P.LED CRI80 Ripple <3%