
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NOVUS H.P.LED



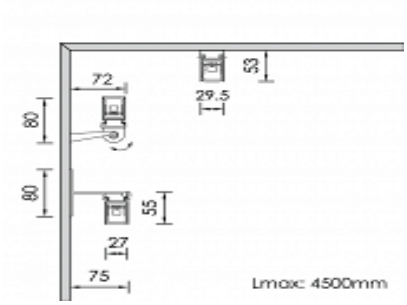

Product Details

CE LM80 Source Type H.P. LED

General Information

Housing	Aluminium
Product code	FA2456CL001DAC
Product family	NOVUS
Diffuser	Clear PMMA
Control Gear	Remote Electronic Driver
Width	27
Length	1040
Height	55


Electrical data


Consumption	27.54
Performance	101.23
Ripple	3
Power Factor	0.96


Luminaire Output

Beam Type	ASY
Beam	13x45º
Luminous Flux	2788
CRI CCT	930

Light distribution







Safety characteristics

IK	10
IP	68
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L80B10