
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

PENDO 2 IP65 CEILING H.P.LED



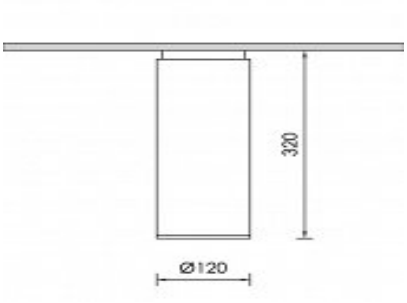

Product Details

CE LM80 LM79 TM21 REACH

Source Type H.P. LED

General Information

Housing	Aluminium
Product code	CM0597CL009ON
Product family	PENDO
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Height	320
Diameter	120


Electrical data


Consumption	20.16
Performance	100.71
Ripple	3
Power Factor	0.96


Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	2030.4
CRI CCT	927

Light distribution







Safety characteristics

IK	07
IP	65

Temperature Operating Conditions

Lifetime	>50.000h