
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

PENDO 2 IP65 CEILING H.P.LED



Technical drawings

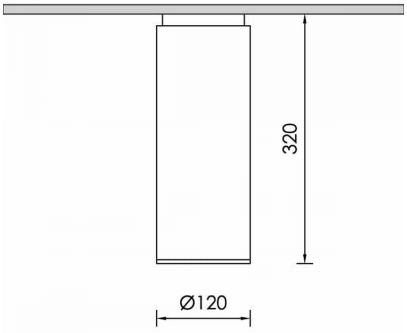

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	CM0602CL009ON
Product family	PENDO
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Options for Dimming Control	On-Off
Height	320 mm
Diameter	120 mm


Electrical data


Consumption	20.16 W
Performance	105.7 lm/W
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	2131 lm
CRI CCT	930

Light distribution





Safety characteristics

IK	07
IP	65

Temperature Operating Conditions

Lifetime	>50.000h