
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

TACTUS 16 SATIS 1F H.P.LED



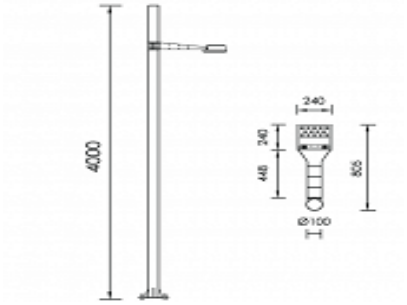

Product Details

CE LM80 Source Type H.P. LED

General Information

Housing	Aluminium
Product code	AM0453CL002ON
Product family	TACTUS
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Width	240
Length	240
Height	100


Electrical data


Consumption	26.6
Performance	130.34
Ripple	3
Power Factor	0.96


Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	3467
CRI CCT	940

Light distribution







Safety characteristics

IK	08
IP	65

Temperature Operating Conditions

Lifetime	> 50.000h